Height..... 335 mm (13.2")
Width..... 297 mm (11.7")
Depth ..... 239 mm (9.4")
Est. Ship Weight.....Polypropylene 8 kg (18 lbs)
PVDF 10 kg (23 lbs)
Air Inlet..... 6 mm (1/4")
Inlet..... 25 mm (1")
Outlet ..... 25 mm (1")
Suction Lift..... 4.5 m Dry (14.7')
9.3 m Wet (30.6')
Displacement per
Stroke ..... 0.06 l (0.015 gal.)[1]
Max. Flow Rate..... 95 lpm (25 gpm)
Max. Size Solids ..... 3.2 mm (1/8")

[1]Displacement per stroke was calculated at 4.8 bar (70 psig) air inlet pressure against a 2 bar (30 psig) head pressure.

Example: To pump 37.9 lpm (10 gpm) against a discharge pressure head of 3.0 bar (44 psig) requires 4.1 bar (60 psig) and 20.4 Nm³/h (12.0 scfm) air consumption. (See dot on chart.)

Caution: Do not exceed 8.6 bar (125 psig) air supply pressure.

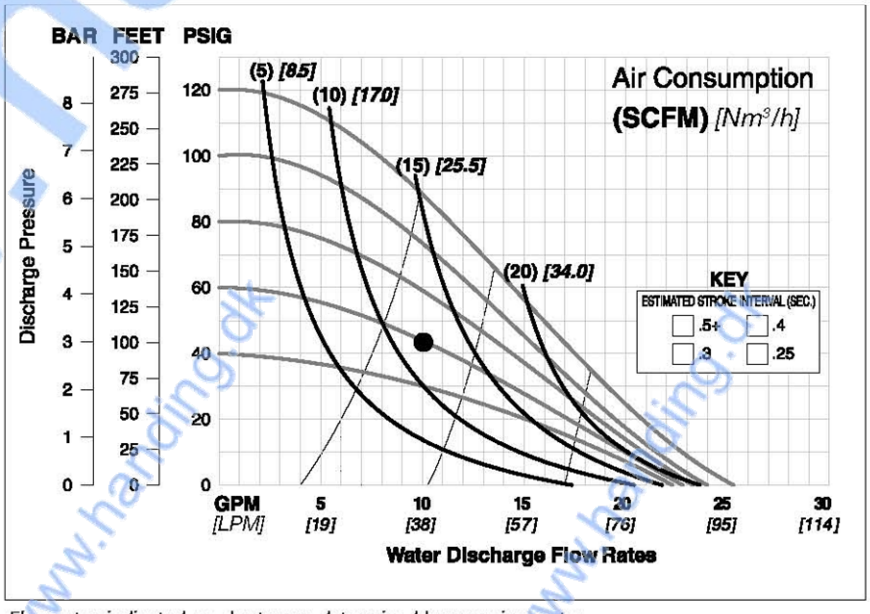

Flow rates indicated on chart were determined by pumping water.

For optimum life and performance, pumps should be specified so that daily operation parameters will fall in the center of the pump performance curve.

Handing ApS
Nordkranvej 5-9, Vassingerød
DK - 3540 Lynge
Tel.: +45 48160166
www.handing.dk

Wilden type A2

Alle mål i mm.
Measures in mm

Dette dokument er vejledende
Der tages forbehold for fejl.
This document is only guiding.
We make reservation for possible errors

Lager nr. /sj
P267

www.handing.dk