

Description

Steam separators are used to remove condensate and dirty water carry-over from steam. By this means trouble-free operation and a long service life of the heat exchanger and steam consumer is obtained.

Application

Downstream of steam boilers and steam-generating units.
Between boiler and superheater.
In steamlines ahead of steam manifolds.
In district-heating lines and flash steam lines.



Upstream of turbines, steam engines, steam tools.

For direct heating with steam.

In spray-vapour humidifier systems for air-conditioning plants.

Technical Data

Pressure rating	Nominal sizes DN	Materials
PN 16 PN 40 PN 63 PN 100 PN 160	15 to 500 mm	St 37.0 / St 35.8
		S235JRG2 (RSt 37-2)
		P265GH (H II)
		16 Mo 3
		13 Cr Mo 4-5
		V 2 A (1.4541) V 4 A (1.4571)

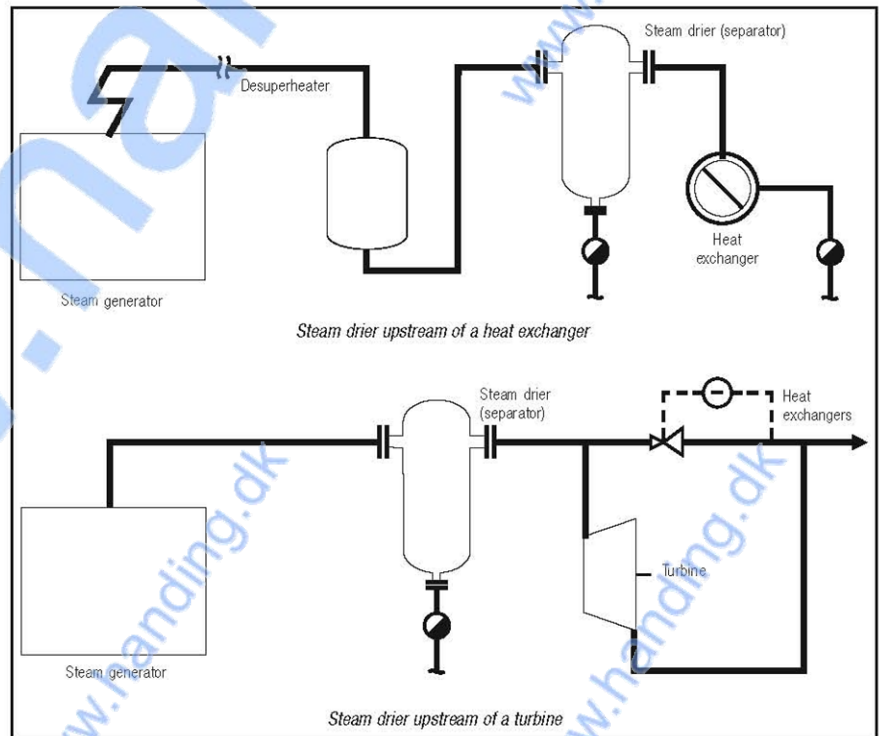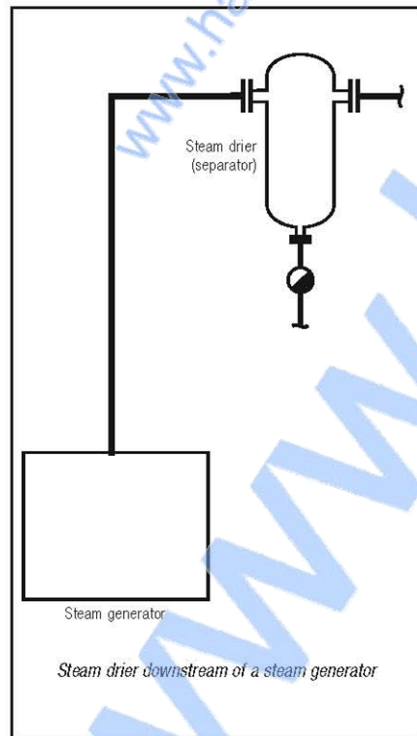

Handing ApS
Nordkranvej 5-9, Vassingerød
DK - 3540 Lyngby
Tel.: +45 48160166
www.handing.dk

Gestra Type TP 50

Dette dokument er vejledende
Der tages forbehold for fejl.
This document is only guiding.
We make reservation for possible errors

Alle mål i mm.
Measures in mm

Lager nr. /sj
SF136